




Manual Chain Hoist

CF Model

Up to 3 t

Easy handling
Long-lasting and
reliable

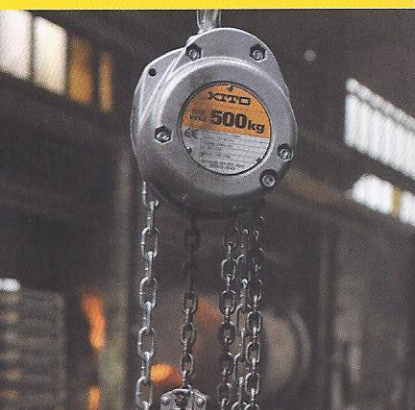

- > **Aluminium die-cast body**
durable and lightweight
- > **Double casing**
for protection against dust and water
- > **Easy handling**
- > **Simple construction**
easy to maintain

Made in Japan!

www.kito.net

Kito Europe GmbH
 Heerdter Lohweg 93
 D-40549 Düsseldorf
 Tel. + 49 (0) 211 - 52 80 09 - 0
 Fax + 49 (0) 211 - 52 80 09 - 59
 info@kito.net
 www.kito.net

KITO HEBEZEUGE
 Mit Sicherheit das Original

Wide hook opening
 top and bottom hook

Aluminium body
 corrosion resistant and
 lightweight

Maintenance-free
sealed bearings
 long lasting

Precise gear mechanism
 effortless handling

Fourfold riveted
 increased safety

Nickel plated load chain
 grade 100 (V) (1000N/mm²),
 in accordance with standard
 EN 818-7



Technical data

Type	CF005	CF010	CF015	CF020	CF030
Capacity, kg	500	1000	1500	2000	3000
Standard lift, m	3,0	3,0	3,0	3,0	3,0
Hand pull to lift full load, daN	30,0	36,0	42,0	40,0	46,0
Chain pulled to lift load 1 meter, m	19	31	41	63	81
Headroom C, mm	325	370	440	510	590
Load chain diameter, mm	5,0 x 15,1	6,3 x 19,1	7,1 x 21,2	6,3 x 19,1	7,1 x 21,2
Chain fall	1	1	1	2	2
Net weight, kg	11,0	13,0	18,0	21,0	28,0
Weight for additional 1 m lift, kg	1,5	1,8	2,1	2,7	3,2

Disclaimer:
 KITO does not assume liability for inappropriate usage of products.
 Operating instructions must be followed at all times.
 Subject to technical change, misprint and errors.

Contact
 Kito Europe GmbH / Heerdter Lohweg 93 / D-40549 Düsseldorf
 Tel. +49 (0) 211 / 52 80 09 - 0 / Fax +49 (0) 211 / 52 80 09 - 59
 info@kito.net / www.kito.net